

PFAS COMPLIANT

LEAD FREE

Elite Lawn








- Pet Areas
- Roof Decks
- Medians
- Multi-Use Activity Areas
- Commercial or Residential



15 Year Manufacturer's Warranty8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

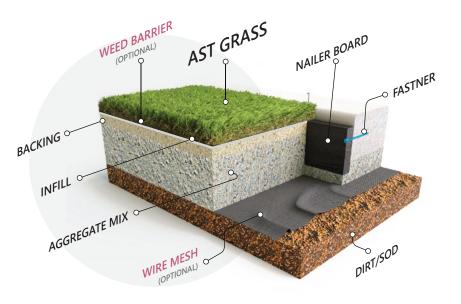

U-BLADE



SPECIFICATIONS

Pile Height: 2.25"

Turf Gauge: 3/8"

Face Weight: 73 oz./yd²

Backing Weight: 9 oz./yd²

Total Weight: 82 oz./yd²

Stitch Rate: 11/10cm

Stitches/M²: 11550

Material/Dtex: PE & PP 14400

Color: Field, Apple, Emerald and Tan Face with

Green and Tan Thatch

Type Of Fiber: PE Monofilament and PP Curled

Thatch

Infill Amount: 3.0 lb./psf.

Primary Backing: Premium AST Backing

Tuft Bind: 12+ lb/force (ASTM D1335)

Blade Type: **U-Blade**

Permeability: 187.9 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 If

Roll Length: 100 If

Sq. Ft. Per Roll: 1500

Total Roll Weight: 945 lbs