

SuperScape 50



R USES


- General Landscape
- **Golf Fringe**
- Lawns
- Pet Areas
- **Roof Decks**
- Medians
- Multi-Use Activity Areas
- Commercial or Residential



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

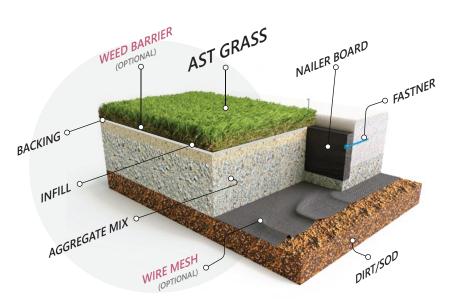

S AND DIAMOND BLADE

SPECIFICATIONS

Pile Height: 1.5"

Turf Gauge: 3/8"

Face Weight: 50 oz./yd²

Backing Weight: 30 oz./yd2

Total Weight: 80 oz./yd²

Stitch Rate: 18.5/10cm

Stitches/M²: 19425

Material/Dtex: PE & PP 10000

Color: Field and Apple Face Fiber With Green and

Tan Thatch

Type Of Fiber: PE Monofilament and PP Curled

Thatch

Infill Amount: 1.5 lb./psf.

Primary Backing: Premium AST Backing

Tuft Bind: 12+ lb/force (ASTM D1335)

Blade Type: S and Diamond

Permeability: 99.8 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 If

Roll Length: 100 If

Sq. Ft. Per Roll: 1500

Total Roll Weight: 927 lbs

